



AVAILABLE CARRIAGES:

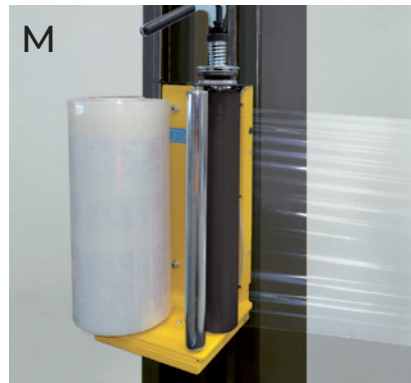

- M**
- Simple functioning;**
- » Manually adjustable lay-on force / tension
 - » Purely mechanical relationship between film regulation and applied tension;
 - » Quick and easy to set;
 - » Film reel weight has no impact on the brake/tension control

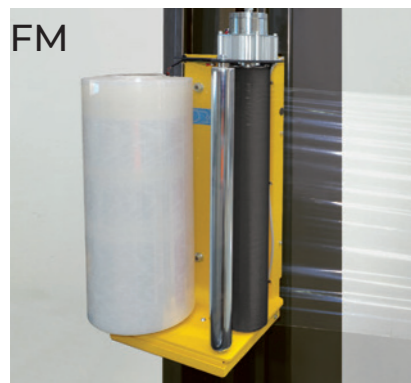

- FM**
- Simple functioning;**
- » Improved control when applying tension to the stretch film roll;
 - » The operator can set and record different programs with a variety of settings;
 - » Film reel weight has no impact on the brake/tension control
 - » Tension regulation is controlled via the operator



- LP**
- Pre-stretch carriage with a dedicated motor;**
- » Reliable pre-stretch up to 150%; 200%; 240% and 300% (NEW)
 - » Adjustable pre-stretch (using different gears)
 - » Possibility to record and save different programs – easy and quick setting via the operator panel
 - » Improved stability of the load thanks to the a reliable pre-stretch system
 - » No-cut pre-stretch rollers



AIR PRESSURE REQUIREMENTS		
Compressed air min. pressure	6 bar	
Compressed air flow	Pressing unit height (mm)	Flow consumption for cycle (l)
	2200	9
	2600	12
	3000	14



OneWrapPlus

PLUS FLEXIBILITY
PLUS FUNCTIONALITIES
PLUS IN ROBUSTNESS

Semi-Automatic Pallet Stretch Wrapper



WRAPPING

OneWrapPlus

The stretch wrapper that gives a “plus” to your production


SIAT OneWrapPlus is the new Siat machine that will allow you to maximize the results of your wrapping activity.

Drawn on the strong mechanical structure of Siat machines, it has an intuitive control panel that will make it easy to program it!

SIMPLE TO USE, COMPLETE IN FUNCTIONALITY

Thanks to the icons on the control panel it is extremely **quick** to set a complete wrapping program that will optimize the film applied to all the different SKU you might need to wrap. This is not the only “Plus” of the machine: it has a very robust structure and the guarantee of a **2400 kg maximum weight** for the platform (excluding HSD platform). Your business would be purchasing a reliable and **high quality** device!

PLATFORM SHAPES

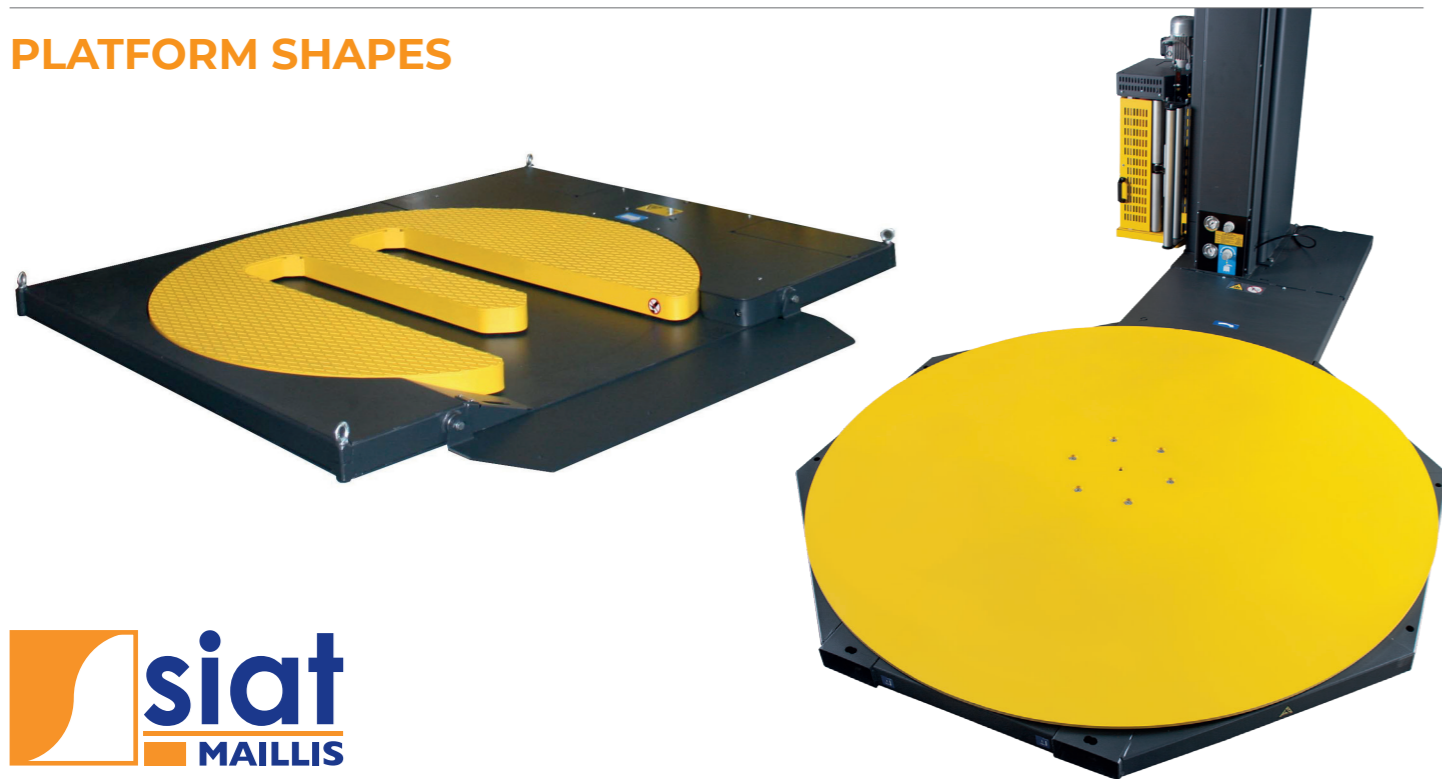

Moreover, with up to **10 customizable wrapping programs** that can be recorded, the operator will only have to program the OneWrapPlus once, and then simply recall the desired wrapping program from the control panel when required.

OPERATIONAL FEATURES

5 different modes of operations:

- » Automatic Up Only or Up & Down wrap cycle;
- » Up & Down (or Up only) with Pause for top sheet
- » Manual Mode

Parameters to adjust:

- » Reinforcement loops up and down, (independent) pressing unit on/off
- » Carriage speed UP & Down (independent)
- » Turntable speed
- » Film tension (lay-on force)
- » Overlap (or carriage descent for top-sheet pause)
- » Photocell delay time



A SAFETY DRIVEN SOLUTION

Siat likes to remind that in an industrial environment **Safety** is always a leading topic. For this reason all of our machines ranges are designed focusing maximum attention to the safety equipment on the unit. **Anti-fall device** and a **safety plate** under

all versions of film carriage are fitted as standard, as well as many other safety features. Your machine will always be efficient thanks to the new facility to upgrade the software version by simply inserting a USB-Key into the control board

CONFIGURATIONS

Feature	Available configurations			
Basement	1650	1800	2200	HSD
MAx load height	2200	2600	3000	
Carriage	M	FM	LP	
Carriage prestretch level (only LP)	150%	200%	240% (std)	300%
Photocell	Photocell suitable for black products available as an option			
Automatic cutting system	Available as option only for LP carriage			

OPTIONALS

- » Ramp for all the platforms sizes;
- » Pit frame;
- » Lifting frame;
- » Weighing system;
- » Pressing unit.