


PNEUMATIC STRAPPING TOOL WITH FRICTION WELD SEAL FOR PET — FLAT AND ROUND SURFACES

TECHNICAL DATA / APPLICATIONS :

Powerful, compact and easy to use strapping tool for heavy-duty industrial applications especially where high quality (PET) Polyester strapping is used and high tension is required.
Available standard in one strap size: 1-1/4"(32 mm)

Package type	Flat - Round 28" minimum diameter (700mm)
Strap type	PET
Strap width	1-1/4" (32mm)
Strap thickness	From .031" - .051" (0.8mm-1.30mm)
Max. Tension	Around 1350 lbf. (6000n)
Air pressure and consumption	From 80 psi - 95 psi (5.5 to 6.5 bar) max.
Max. Tension speed	Around 19.5' min. (6 mt/min)
Joint type	Friction Weld Seal
Weight	Around 12 lbs. (5.6 Kg)
Order Code: POLI 32 HT	110.320.630

- **ERGONOMIC**
- **MODERN DESIGN**
- **COMPACT AND LIGHT**
- **BOSCH PNEUMATIC MOTORS**
- **ONE-PIECE STRAP INSERTION**
- **EASY TOOL REMOVAL**

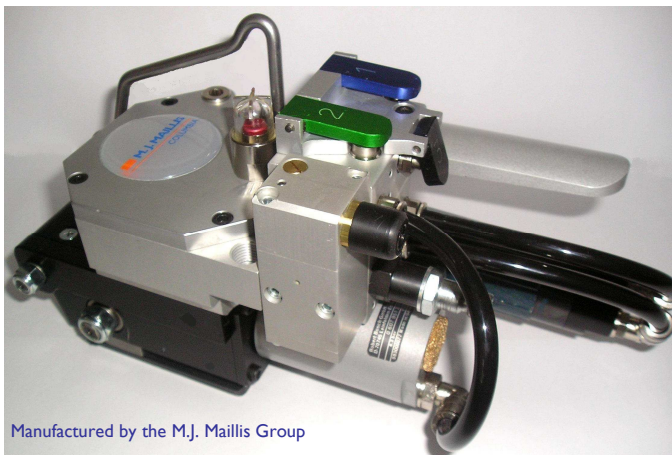

Manufactured by the M.J. Maillis Group



- **HIGH STRAP TENSIONING**
- **ON REQUEST UPPER AIR CONNECTION CONFIGURATION**


- EASY AND FAST ADJUSTMENTS -

**WELDING TIMER
ADJUSTMENT SCREW**


**LEVER 2— WELDING AND CUTTING
(GREEN):**
PUSH TO START WELDING AND CUTTING

LEVER 1—TENSION (BLUE):
**HOLD IT PUSHED UNTIL THE
RIGHT TENSION VALUE**

LEVER 3- RELEASE (BLACK):
**WHEN THE PRESSURE
INDICATOR IS DOWN, HOLD
IT PUSHED UNTIL THE STRAP
IS RELEASED**

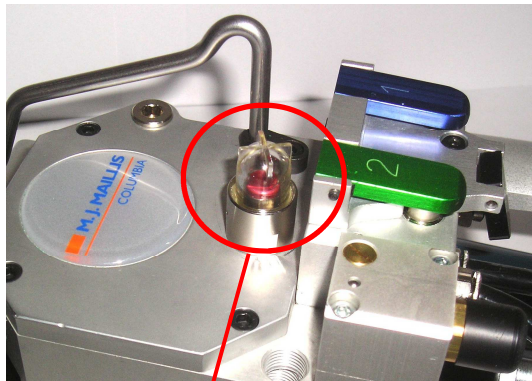


**WELDING TIMING
INDICATOR**

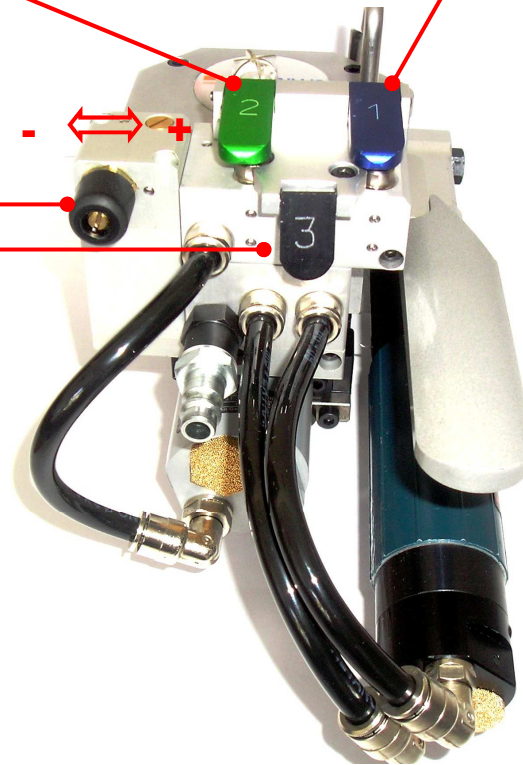

**TURN THIS SCREW TO ADJUST THE MOTOR
POWER**



HT

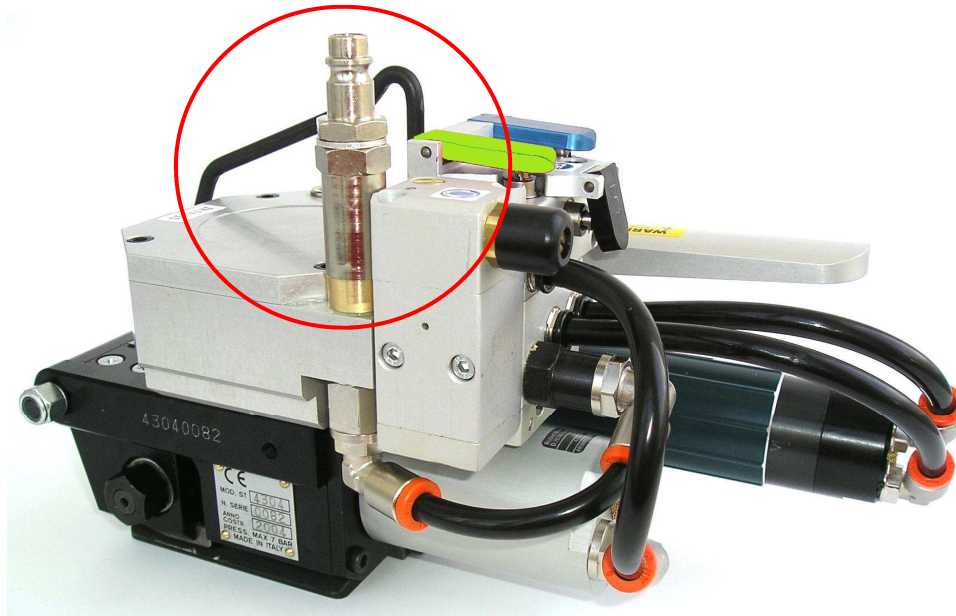- CONFIGURATIONS ON REQUEST -

AN UPPER AIR CONNECTION IS PARTICULARLY USEFUL WHEN USED WITH A SPRING BALANCER. THIS OPTION IS AVAILABLE BUT MUST BE INDICATED WHEN ORDERING

ACCESSORIES

- | | |
|---|-------------------------|
| • FILTER + LUBRICATOR + PRESSURE ADJ GROUP | CODE 601.010.830 |
| • SPIRAL/COIL 8" X 11' HOSE (15MT) WITH AIR CONNECTORS | CODE 281.218.300 |
| • SPRING BALANCER 11-18 lbs. (5-8.5KG) | CODE 605.080.090 |

OPTIONS

- | | |
|---|-------------------------|
| • SUSPENSION BRACKET KIT 3 POSITIONS | CODE 291.030.500 |
|---|-------------------------|

