


**PNEUMATIC STRAPPING TOOL WITH FRICTION WELD SEAL FOR PLASTIC
(PET / PP) STRAP — FLAT AND ROUND SURFACE—**

TECHICAL DATA / APPLICATIONS:

Only for welding strapping tool. Compact, easy and versatile. This tool friction welds, then cuts the strap. Available in four strap sizes: 3/8"(10mm), 1/2"(13mm), 5/8"(16mm) and 3/4"(19mm).

Package type	Flat and Round. Suitable for strapping fiber bales using press system
Strap type	PET / PP
Strap width	From 3/8" to 3/4" (10mm-19mm)
Strap thickness	From .020 to .050 (0.4mm-1.3mm) Optional .060 (1.5 mm)
Air pressure	From 80 psi (5.5 bar) to a 95 psi (6.5 bar)
Joint type	Friction Weld Seal
Weight	Around 5.1 lbs. (2.3 Kg)
Order Code: ST POLI WELDS / CUTS	124.160.040

- EASY TO USE
- ERGONOMIC
- MODERN DESIGN
- COMPACT
- LIGHT WEIGHT
- INSERT BOTH STRAPS TOGETHER

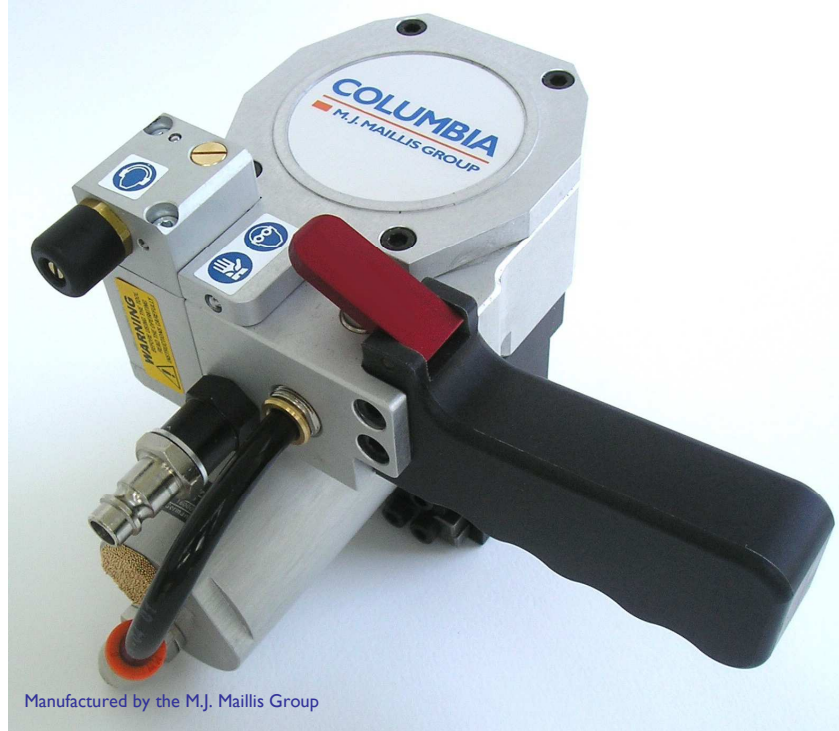

Manufactured by the M.J. Maillis Group

MAILLIS STRAPPING SYSTEMS—USA Inc. 404 Wall Street, Fountain Inn, SC 29644

Phone: 877-962-4648 / Fax: 864-409-0367 / Web: maillisstrapping.com / E-mail: info@maillisstrapping.com

rev. 05/2015

- EASY AND FAST ADJUSTMENTS -




UNIVERSAL STRAP GUIDE
OCCOMIDATES DIFFERENT
SIZE STRAP

LEVER RED - WELDING AND CUTTING
(OPTIONAL):

PUSH TO START WELDING AND CUTTING
(OPTIONAL)

TURN THIS SCREW TO ADJUST THE
WELDING TIMER

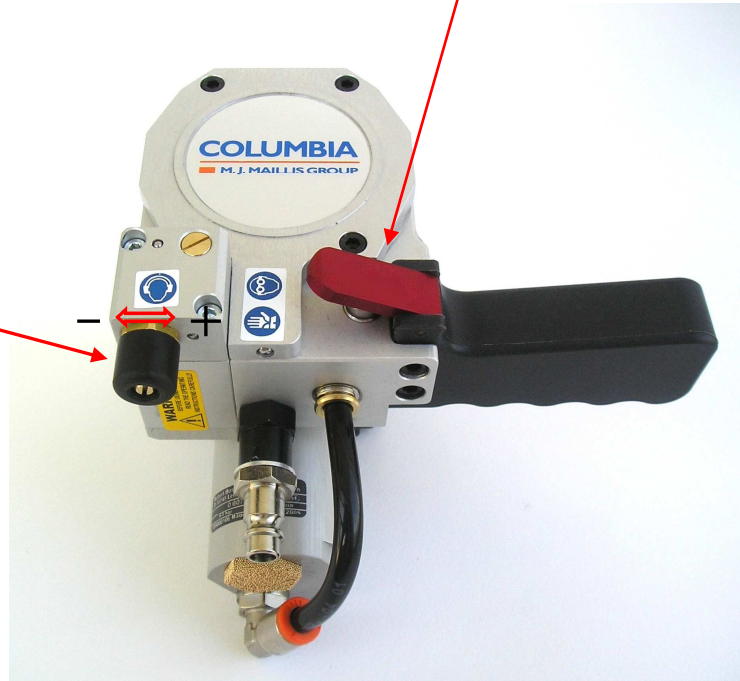

ERGONOMIC HANDLE

- TYPICAL APPLICATIONS -

I
S
T
R
A
P
T




W
C
E
L
D
I
N
G

AFTER THE WELDING CYCLE COMPLETES - WAIT 2 SECONDS PRIOR TO REMOVING THE STRAP FROM THE TOOL



STRAPPING FIBER BALES USING PRESS SYSTEM

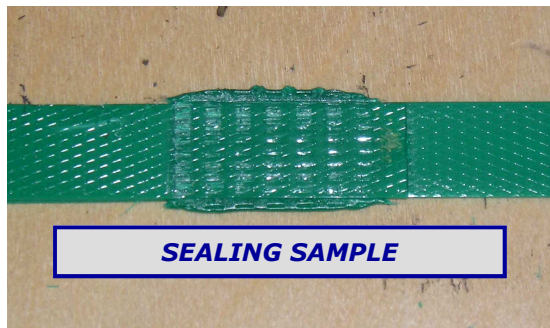

SEALING SAMPLE