

S26



other languages: www.siat.com




> **Machine dimensions**
Dimensioni macchina
Machinemessungen
Dimensions machine
Dimensiones de máquina

Size / Weight packaging			LxWxH
> S26	185	220	133x110x175


> S26

	Min.	Max
L	1080	-
W	890	-
H	1555	2125
cbh	480	820
AS 77	cbh +110	cbh +110
AS 80	cbh +160	cbh +160

> S26

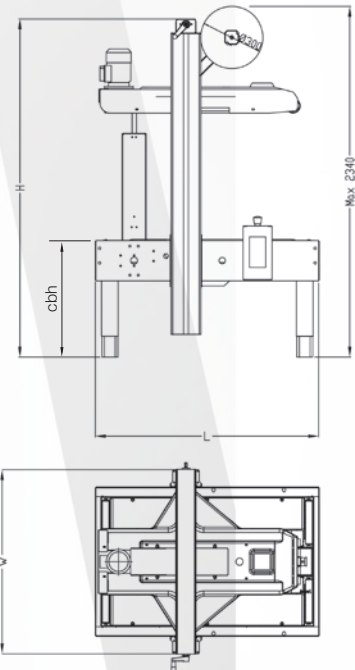

> **Box dimensions**
Dimensioni delle scatole
Kartonabmessungen
Dimensions des boîtes
Dimensiones de cajas




* With top side pressure rollers (minimum width manageable 180mm).
Upper guides required in case of width box less than 180mm (optional).

> S26

	K12R std. / K11R on demand	
	Min.	Max
l	150	∞
w*	170 / 140	650
h	100	950


> **Production capacity**
Capacità di produzione
Produktionskapazität
Capacité de production
Capacidad de producción



> S26	Bph
Max pcs.*	1200

* Always based on shorter manageable box


> **Standard voltage**
Voltaggio standard
Standardspannung
Tension standard
Voltaje estándar



> S26

380/415V - 50Hz - 3Ph	
Amps	1,08
Power kW	0,26
Phase	3Ph + PE


> **Taping units**
Unità nastranti
Verschliesseinheiten
Unités enrubanneuses
Unidades de precinto




	K11R/ K12R	
	mm	
A	410 Max	
B	50 / 75	
C	76	

> **Optionals**
Accessori
Zubehör
Accessories
Accesorios

> **AS80**
Higher legs
Set gambe più alte
Höhere Stützen
Pieds plus hauts
Patas más altas




> **AS77**
Casters
Set ruote
Rädchen
Roulettes
Ruedas




> **RG**
Roller conveyor
Piani a rulli
Rollenbahnen
Plans à rouleaux
Rodillos libres



> **GTL - GTR**
Extendable conveyor
Rulliera estensibile
Ausziehbare rollenbahnen
Convoyeur extensible
Rodillos extensibles



> **K-125 / K-250**
Inkjet printer
Stampante ad inchiostro
Tintenstrahldrucker
Marqueur à jet d'encre
Impresora de inyección de tinta



SIAT

MAILLIS

www.siat.com • siat@siat.com