

SANITARY ERGOPACK®



ERGONOMIC SOLUTION TO HAND PACKING

The innovative Combi Ergopack® has raised the standard for hand packing productivity in washdown processing environments. Efficient and durable, our Sanitary Ergopack® combines a case erector, a hand pack station and a case sealer into a compact and cost-effective workcell. This ergonomically designed machine features a hands-free indexing system that positions cases and product for optimal operator comfort, minimizing repetitive wrist and arm motions.

The Combi sanitary design minimizes potential areas where undesirable microorganisms might gather. This system, first to the industry, helps food and pharmaceutical producers to meet the highest levels of hygiene and safety.

- **CLEANABLE** - Constructed to ensure that the equipment can be effectively and efficiently cleaned and sanitized, over the lifetime of the equipment
- **OPEN DESIGN CONSTRUCTION** - Stainless steel materials are corrosion resistant and compatible with cleaning and sanitizing chemicals
- **ACCESSIBLE** - Parts of the packing system are readily accessible and disassembled for inspection and cleaning without the use of tools
- **WATER SHEDDING SURFACES** - Covers are self-draining to assure that product, water or liquids do not accumulate or pool on the equipment surfaces
- **NO HOLLOW AREAS** - Hollow areas with penetrating rivets or fasteners are eliminated
- **NO NICHES** - Equipment is free of niches and all welds are continuous and fully penetrating
- **HYGIENIC MAINTENANCE ENCLOSURES** - Control panels are sloped or pitched and easily cleaned and sanitized




RTE 2-EZ®SB ERGOPACK®
Sanitary Hand Packing Station

SANITARY ERGOPACK®

CHARACTERISTICS:


- Underside of product infeed conveyor belt accessible for cleaning
- Water shedding, sloped covers
- Washdown pneumatic cylinders and valves
- Minimal surface contact between adjoining parts
- Timing belts in lieu of chain
- Expanded stainless steel guarding
- Solid adjustment handles - no tubing
- Minimal horizontal surfaces

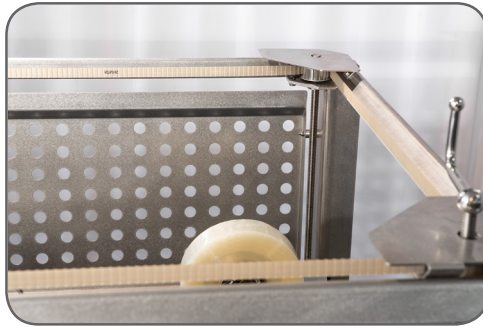

MODEL	CASE SIZE MIN (LXWXH)	CASE SIZE MAX (LXWXH)	SPEED: CPM*
E-2500 Ergo	8½ x 5 x 5" (216x127x127mm)	20 x 13½ x 16" (508x343x406mm)	12
2-EZ®SB Ergo	8 x 6 x 5" (203x152x127mm)	24 x 16 x 18" (610x406x457mm)	8-20" Long 15 cpm 20-24" Long 12 cpm
2-EZ®HS Ergo	8 x 6 x 5" (203x152x127mm)	24 x 16 x 18" (610x406x457mm)	20

DISTRIBUTED BY:

* Speeds are operator and case size dependent

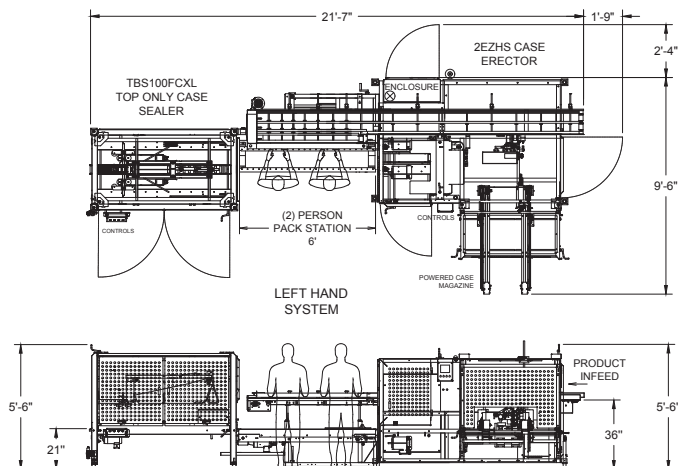

COMBI
PACKAGING SYSTEMS LLC

6299 Dressler Rd NW North Canton, OH 44720

Phone: 1-800-521-9072 www.combi.com

© 2018 Combi Packaging Systems LLC, a joint venture with 3M™ and Maillis Group